



KTU

Kunststoff-LED-Rettungszeichenleuchte gem. DIN EN 60598-1, DIN EN 60598-2-22 und DIN EN 1838. Geeignet für Wand-, Decken-, oder Auslegermontage.
Erhältlich als Einzelbatterieleuchte mit 3-stündigem Notbetrieb.

- Neueste LED-Technik garantiert gleichmäßige Ausleuchtung
- Lebensdauer des Leuchtmittels über 50.000 Std. reduziert Wartungskosten
- Geringe Stromaufnahme reduziert Energiekosten
- Schnelle Montage durch werkzeuglos zu öffnendes Gehäuse
- Universalpiktogramme im Lieferumfang enthalten

Plastic LED emergency exit display luminaire acc. to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.
For ceiling, wall or wall bracket mounting.
Available as self-contained emergency luminaire for 3 hours emergency operation.

- Latest LED technology assures even legend illumination
- Up to 50,000 hours lamp life reduces maintenance costs
- Low power consumption reduces running costs
- Mounting plate for ease of installation
- Universal pictograms for all directions included

Gehäusematerial:	Kunststoff, weiß
Piktogramm:	Folie Siebdruck RAL 6032
Schutzart/Schutzklasse:	IP54 / II
Montageart:	Decke / Wand / Ausleger Optional: Pendel / Kette / Seil
Zulässige Umgebungstemp.:	-5° bis +40°C


Body:	Plastic, white
Legend:	Foil silk-screen printed RAL 6032
Protection class / category:	IP54 / II
Mounting:	ceiling / wall / wall bracket pendant / chain / rope optionally
Permissible temp.:	-5° up to +40 °C



Universal
Piktosatz
inklusive!
Universal
pictograph set
included!




KTS

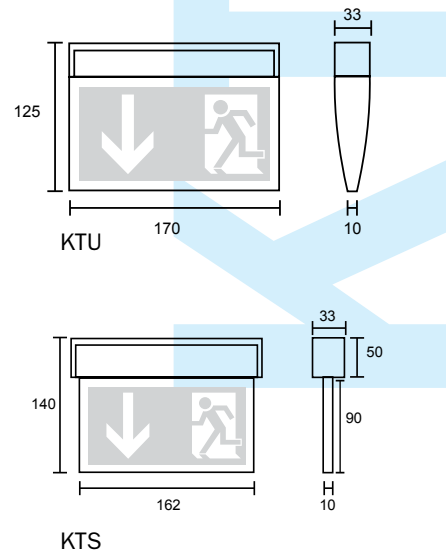

Ausführung Version	Bestellnummer Order number	Überbrückungszeit Operating Time	Leuchtmittel Illuminant	Lumen Lumen	Batterie Battery	Gewicht kg Weight kg
Einzelbatterieleuchten Self-contained luminaires						
LED 230V/ 3h AC	KTU003	3h	LED (1,5W)	–	4,8V/0,3Ah	0,25
LED 230V/ 3h AC	KTS003	3h	LED (1,5W)	–	4,8V/0,3Ah	0,25

Bohrabstände KT Decke/Wand Drilling distances KT ceiling/wall

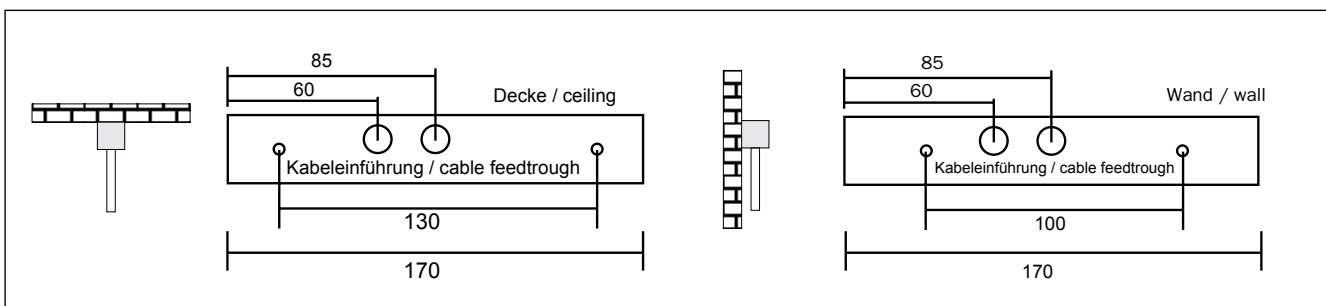

Optionen und Zubehör Options and Accessories

